


CHCNAV

TX73

**MCNAV TX73
EXCAVATOR SYSTEM**



**MACHINE CONTROL
& CONSTRUCTION**

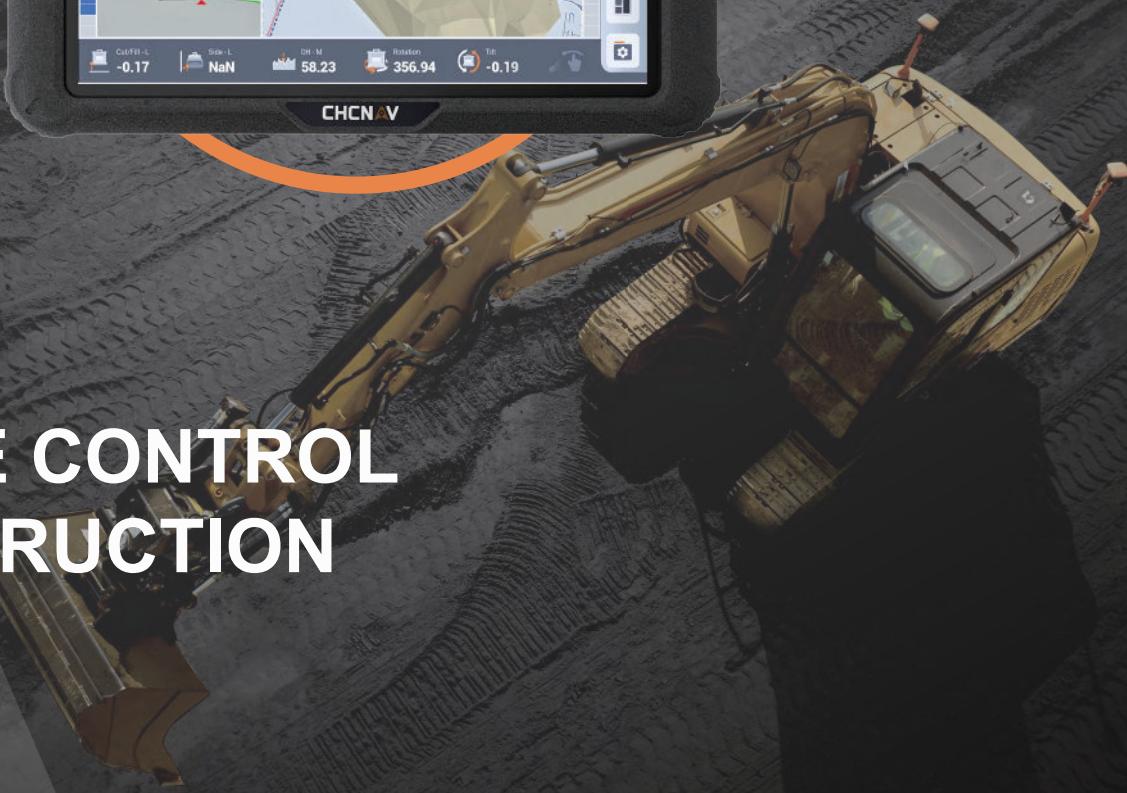

3D EXCAVATOR GUIDANCE SYSTEM


EFFICIENCY BENEFITS QUALITY

MCNAV for Excavators helps you complete high-quality construction in less time and lower cost. High-precision GNSS receiver and rugged IMU sensors provide operators clear tip position guidance through design models. MCNAV allow operators dig to target surfaces more quickly without stake out, improve efficiency and productivity.

OUTSTANDING FEATURES AND EXPERIENCES

3D / Customizable / Precision


- First rate 3D view and high-fidelity CAD drawings
- Customizable shortcuts
- Progress and results real-time displayed via color-coded maps
- 2D/3D mode quick switching

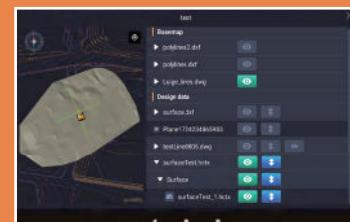

EASY TO USE

Calibration / Interaction / Cloud


- Simple wizard calibration process
- Immediate start-up
- Remote access, troubleshooting and data synchronization via iSite cloud platform.
- OTA updates

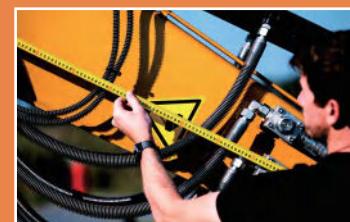

EXCELLENT COMPATIBILITY

Attachments / RTK Base / Data Formats

- Support a wide range of attachments.
- Widely compatible with radio protocols, support Satel external radio module.
- Built-in global editable coordinate system presets. Supports a variety of coordinate system files and design file formats.

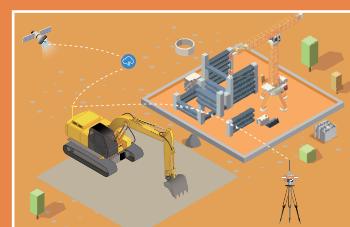

RELIABLE HARDWARE

Rugged / High-performance / Durable

- High-reliability industrial design
- High-performance, high-integration MC300 receiver
- IP69K IS300 IMU sensor
- IP68 GNSS antenna with metal bottom shell





3D GUIDANCE SYSTEM FOR EXCAVATORS



CHCNAV Machine Control Solution



TG 63 Grader Control



TD63 & TD63 Pro Dozer Control



RTK Base&Rover

SPECIFICATIONS

System Features

1. High-fidelity CAD drawings and full views provided, include 3D view, top view, side view and big-font information view.
2. High customizability working interface.
3. Control data visibility, elevation guidance, and horizontal guidance by layers.
4. Widely compatible of attachments, support standard bucket, tilt bucket, tiltrotator and trapezoidal bucket.
5. Separated design of quick coupler, tiltrotator and buckets, freely combine after calibration once.
6. Built-in global coordinate system, supports *.dc, *.cal, *.jxl, *.lok, *.loc coordinate file.
7. Variety design file formats support, include *.LandXML, *.DWG, *.DXF, *.HCTX.
8. Compatibility with TT450S, Transparent and Satel_3AS radio protocols.
9. Quickly design surfaces in the field, streamlining operational workflow.
10. Local region based cloud platform, file distribution and remote access everywhere.

MCPad300 Display

Size (W*L*H)	281*181*42 mm
Weight	1.5 kg
Screen	10.1" 1920x1200 pixel
System	Android 14 8 core up to 2.2GHz 6+64G
Operation temperature	-30°C ~ +60°C
Storage temperature	-40°C ~ +85°C
Ingress protection	IP67

MC300 Receiver

Size (W*L*H)	215*154*58 mm
Weight	1.11 kg
Power	7 ~ 36 V DC
Real time kinematics(RTK)	Horizontal: 8 mm + 1 ppm RMS Vertical: 15 mm + 1 ppm RMS
Operation temperature	-30°C ~ +65°C
Storage temperature	-40°C ~ +85°C
Ingress protection	IP67

AT315 GNSS Antenna

Size (W*L*H)	140*140*55 mm
Weight	0.7 kg
Power	3.3 ~ 12 V DC
Gain	40 ± 2 dB
Noise coefficient	≤2 dB
Shock	40G / 11 ms
Vibration	7.7GRMS, 10~ 1000 Hz
Operation temperature	-40°C ~ +75°C
Storage temperature	-50°C ~ +85°C
Ingress protection	IP68

*Specifications are subject to change without notice.

WWW.CHNAV.COM | MARKETING@CHNAV.COM

CHC Navigation Headquarter
Shanghai Huace Navigation Technology Ltd.
577 Songying Road, Qingpu,
201703 Shanghai, China
+86 21 54260273

CHC Navigation Europe
Office Campus, Building A,
Gubacs út 6, 1097
Budapest, HUNGARY
+36 20 421 6430
Europe_office@chcnav.com

CHC Navigation USA LLC
6380 S. Valley View Blvd, Suite 246,
Las Vegas, NV 89118, USA
+1 702 405 6578

CHC Navigation India
409 Trade Center, Khokhra Circle,
Maninagar East, Ahmedabad,
Gujarat, India
+91 90 99 98 08 02